

## Best Distribution and Plotting Positions of Daily Maximum Flood Estimation at Ona River in Ogun-Oshun River Basin, Nigeria.

T. A. Ewemoje<sup>1\*</sup> and O. S. Ewemooje<sup>2</sup>

<sup>1</sup>Department of Agricultural and Environmental Engineering, University of Ibadan, Nigeria

<sup>2</sup>Department of Statistics, University of Ibadan, Nigeria

E-mail: [ta.ewemoje@mail.ui.edu.ng](mailto:ta.ewemoje@mail.ui.edu.ng) [tayo\\_ewemoje@yahoo.co.uk](mailto:tayo_ewemoje@yahoo.co.uk)

### ABSTRACT

The paper discusses how Normal, Lognormal, and log-Pearson type 3 distributions were investigated as distributions for modelling at-site annual maximum flood flows using the Hazen, Weibull, and California plotting positions at Ogun-Oshun river basin in Nigeria. All the probability distributions when matched with Weibull plotting position gave similar values near the center of the distribution but varied considerably in the tails. The Weibull plotting position when matched with Normal, Log-normal and Log Pearson Type III probability distributions gave the highest Coefficient of determinations of 0.967, 0.987, and 0.986 respectively. Hazen plotting position gave minimal errors with the RMSE of 6.988, 6.390, and 6.011 for Normal, Log-normal, and Log-Pearson Type III probability distributions respectively. This implies that, predicting statistically using Hazen plotting position, the central tendency of predicted values to deviate from observed flows will be minimal for the period under consideration. Minimum absolute differences of 2.3516 and 0.5763 at 25- and 50-year return periods were obtained under the Log-Pearson Type III distribution when matched with Weibull plotting position, while an absolute difference of 0.2338 at 100-year return period was obtained under the Log-Pearson Type III distribution when matched with California plotting position. Comparing the probability distributions, Log-Pearson Type III distribution with the least absolute differences for all the plotting positions is the best distribution among the three for Ona River under Ogun-osun river basin study location.

**Key words:** Probability distributions, Plotting positions, Maximum flood, Statistical modelling, Nigeria.

### 1. INTRODUCTION

Floods are natural hazards causing loss of life, injury, damage to agricultural lands, and major property losses (Fill and Stedinger, 1995). One method of decreasing flood damages and economic losses is to use flood frequency analysis for determining efficient designs of hydraulic structures. In hydrology, estimation of peak discharges for design purposes on catchments with only limited available data has been a continuing problem (Blazkova and Bevenb, 1997). A promising and elegant approach to this problem is the derived flood frequency curve. Reliable estimates of flow statistics such as mean annual flow and flood quantiles are needed, however, historical data that are needed to estimate these statistics are not always available at the site of interest or available data may not be representative of the basin flow because of the changes in the watershed characteristics, such as urbanization (Pandey and Nguyen, 1999; Ouarda, et al, 2006).

In practice, design floods often are estimated on the basis of a single site and/or regional flood-frequency analysis (Burn, 1990). An optimum design can be achieved with proper flood frequency and risk analyses (Saf, 2008). However design floods estimated by fitted distributions are prone to modelling and sampling errors (Alila and Mtiraoui, 2002). Several

researchers have investigated different distributions for application to flood-frequency analysis (Cunnane, 1989; GREHYS, 1996; Blazkova and Beven, 1997; Saf, 2008).

The available historical hydrometric data especially in developing countries can be short, limited or nonexistent (Fill and Stedinger, 1995) to the extent that it is far from being representative of the region under consideration, or getting it may be expensive, difficult, or time consuming (Oztekin et al, 2007; Patel, 2007). Most frequent uses of statistics in hydrology all over the world have been that of frequency analysis, which were largely in the area of flood flow estimation. Best probability distributions that can be used in various situations are based on certain properties of such distributions (Haan, 1994). Hydrologist finds it difficult to make accurate prediction of flood estimates using limited historic information of runoff, rainfall, river stages. These can be attributed to lack of trained personnel and equipment for adequate assessment of these quantities on systematic basis in Nigeria (Adeboye and Alatisé, 2007).

The distributions suggested for fitting flood extremes data have been many (Singh and Strupczewski, 2002). Oztekin et al. (2007) applied parameter estimation methods to a comprehensive list of different distributions. Different studies were undertaken on distribution selection for flood data all over the world. The three-parameter log-Pearson type 3 distribution is the most frequently used distribution in the USA, whereas the generalized extreme value distribution in Great Britain, the lognormal distribution in China (Singh and Strupczewski, 2002). Several flood distributions have also been studied, for example in USA (Wallis, 1988; Vogel et al., 1993); UK, Australia, Italy, Scotland, Turkey and Kenya (Haktanir, 1991; Mutua, 1994; Abdul Karim and Chowdhury, 1995). There is no question that hydro-climatic regimes may be different for different regions, but the differences in regimes should serve as a hydro-physical basis for choosing a particular distribution. Therefore, selection of an appropriate distribution needs closer attention.

Probability distribution functions of continuous random variables are used to fit distributions in hydrology. All plotting position relationships give similar values near the center of the distribution but may vary considerably in the tails (Hann, 1994). Several plotting position relationships are presented in Chow (1964) while Haan (1994) suggested the use of California, Hazen and Weibull plotting position relationships as the three commonly used relationships positions satisfying the Gumbel (1958) five criteria for plotting position relationships. Similarly, Abida and Ellouze (2007) opined that the most commonly applied distributions now being the Gumbel (EV1), the Generalized Extreme Value (GEV), the Log Pearson Type III (LP3), and the Three parameter Lognormal (LN3)

This work applied three commonly used distributions and three different plotting position relationships (Table 1) to select the best flood frequency distribution that best fits the annual maximum flood flows of Ona River under Ogun-oshun river basin development in Nigeria.

Table 1: Plotting Position Relationships.

Name	Source	Relationship
California	California(1923)	$\frac{m}{n}$
Hazen	Hazen(1930)	$\frac{2m-1}{2n}$
Weibull	Weibull(1939)	$\frac{m}{n+1}$

Source: Haan, 1994.


2

## 2. MATERIALS AND METHODS

### 2.1 Study Area

Ogun-Osun River Basin Development Authority (OORBDA) which is a parastatal of the Federal Ministry of Water Resources and Rural Development. OORBDA area covers the whole of Osun, Oyo, Ogun and Lagos States and has estimated land area of 66,264 km<sup>2</sup>. It is drained by two main rivers – Ogun and Osun Rivers (after which it is named) and a number of tributaries and smaller rivers namely; Sasa, Ona, Ibu, Ofiki and Yewa rivers. OORBDA lies between latitudes 6°30' - 8°20' N and longitudes 3°23' - 5°10' E (Figure 1). The data on mean annual rainfall for 30 years over OORBDA show a variation from about 1,150mm in the northern part to around 2,285mm in the southern extremity. The monthly rainfall distribution shows a distinct dry season extending from November through March and a rainy season divided into two periods: April – July and September – October.

Ibadan city, has a humid equatorial climate with warm temperatures, high humidity and rainfall (Eze, 1997). International Institute of Tropical Agriculture (IITA) meteorological station is about 500m northwest of Ona River at 7° 29' N and 3° 54' E (Figure 1) which is a tributary of Osun River. Annual rainfall for Ibadan is between 1000-1600mm, with the mean around 1270mm (Lal, 1993). Approximately, 50% of the average annual rainfall occurs between April and July while 40% occur between August and October. November to March is usually the driest months and temperatures tend to be higher. Mean day length of this latitude is 12 hours, ranging from a minimum of 11.5 in December to a maximum of 12.7 hours in June.

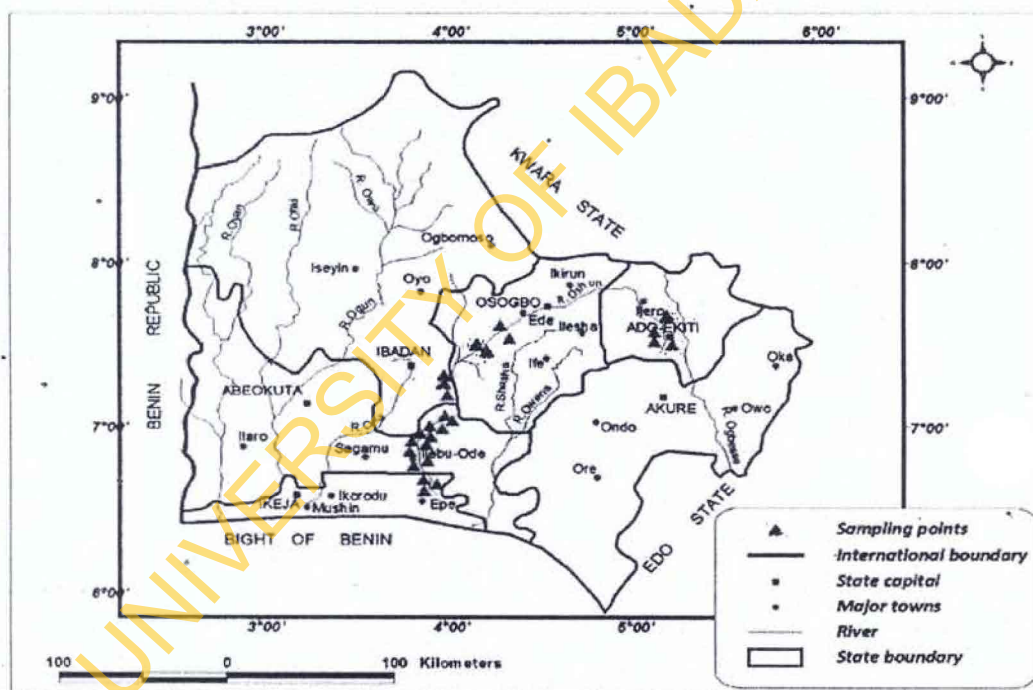

Adapted from: Joshua and Oyebanjo (2009)

Figure 1: Ogun-Oshun River Basin Development Authority (OORBDA) Coordinates.

In determining the best distributions for daily flood estimation for Ona River at Ogun-Oshun River Basin, three plotting positions and three probability distributions were plotted against the annual maximum discharges of the river. Furthermore, the coefficients of determination, root mean square errors (RMSE) and absolute differences between predicted and observed discharges were used to determine how well the predicted discharges were able to predict the observed discharges.

## 2.2 Flood Frequency Analysis Methodology

### (i) Normal Distribution

$$f(z) = \frac{1}{\sqrt{2\pi}} e^{-z^2/2}, \quad -\infty < z < \infty. \quad \dots (1)$$

Where:  $z$  is standard normal variable  
 $e$  is exponential.

The Statistical Parameters are;

$$\text{Mean} \Rightarrow \bar{Q} = \frac{1}{n} \sum_{i=1}^n Q_{max} \quad \dots (2)$$

$$\text{Standard Deviation} \Rightarrow s_Q = \sqrt{\frac{\sum_{i=1}^n (Q_{max} - \bar{Q})^2}{n-1}} \quad \dots (3)$$

Where:  $\bar{Q}$  is mean of the annual maximum discharges ( $m^3/s$ )  
 $Q_{max}$  is annual maximum discharges ( $m^3/s$ )  
 $s_Q$  is standard deviation of annual maximum discharge ( $m^3/s$ )  
 $n$  is number observations.

The frequency factor or standard normal variable,  $z$ , can be approximated by the empirical relation (David A. Chin 2006, P319).

$$z = w - \frac{2.515517 + 0.80285w + 0.010328w^2}{1 + 1.432788w + 0.189269w^2 + 0.001308w^3} \quad \dots (4)$$

Where;  $w = \sqrt{\ln\left(\frac{1}{P^2}\right)}, \quad 0 < P \leq 0.5 \quad \dots (5)$

$P$  is the probability of exceedance, where  $P > 0.5$ ,  $1-P$  is substituted for  $P$ . The value of  $z$  computed using the above equation is given a negative sign; the error in using the equation to estimate the frequency factor is less than 0.00045 (Chin, 2006).

The predicted floods at various return periods were determined using the mathematical expression:

$$Q_T = \bar{Q} + z \cdot s_Q \quad \dots (6)$$

$Q_T$ ,  $\bar{Q}$ ,  $z$  and  $s_Q$  have been previously defined.

### (ii) Lognormal Distribution: The Probability Density Function (*pdf*) is given as:

$$f(x) = \frac{1}{x\sigma\sqrt{2\pi}} \exp\left(\frac{-y-\mu_y}{2\sigma_y^2}\right), \quad x > 0 \quad \dots (7)$$

The central limit theorem was used in deriving the general result that; if a random variable  $x$  is made up of the sum of many small effects, the  $x$  might be expected to be normally distributed. Similarly, if  $x$  is equal to the product of many small effects, then the  $\ln x$  can be expected to be normally distributed. This can be seen by letting  $Y = \ln x$  (Haan, 1994).

$$Y = \ln X \quad \dots (8)$$

Hence;  $\bar{y} = \frac{1}{n} \sum_{i=1}^n \log Q_{max} \quad \dots (9)$

$$s_y = \sqrt{\frac{\sum_{i=1}^n (y_i - \bar{y})^2}{n-1}} \quad \dots(10)$$

$$y = \log Q_{max} (m^3/s) \quad \dots(11)$$

Where,  $\bar{y}$  is mean of  $y$  ( $m^3/s$ );  $s_y$  is standard deviation ( $m^3/s$ );  $n$  is as previously defined.

The intermediate variables and standard normal variable corresponding to the ranked annual maximum discharges were previously determined by equations (5) and (4) respectively.

The statistical variate and the predicted discharges are:

$$y_T = \bar{y} + z \cdot s_y \quad \dots(12)$$

$$Q_T = 10^{(\bar{y} + z \cdot s_y)} \quad \dots(13)$$

Where,  $y_T$  is variate of the annual maximum discharges at return period  $T$ (years);  $\bar{y}$  is the logarithm mean of annual maximum discharges ( $m^3/s$ );  $Q_T$ ,  $z$ ,  $s_y$  are as previously defined.

**(iii) Log Pearson Type III Distribution:** The *pdf* of this distribution is given as:

$$f(x) = \frac{1}{\beta \alpha \Gamma(\alpha)} (x - \gamma)^{\alpha-1} e^{-(x-\gamma)/\beta}, \quad x \geq \gamma \quad \dots(14)$$

The mean, variance and skewness coefficient of the three parameters ( $\alpha$ ,  $\beta$  and  $\gamma$ ) gamma distribution is given by:

$$\mu_x = \gamma + \alpha\beta, \quad \sigma_x^2 = \alpha\beta^2, \quad g_x = \frac{2}{\sqrt{\alpha}}$$

The random variable is first transformed using the relation,

$$Y = \ln X$$

The Pearson Type III distribution is also called the Three-Parameter Gamma distribution, the frequency factor depends on both the return period,  $T$ , and the skewness coefficient,  $g_x$ . If the skewness coefficient falls between -1 and +1, approximate values of the frequency factor for the Gamma/Pearson Type III distribution,  $K_T$ , can be estimated using the relation (Chin, 2006).

$$K_T = \frac{1}{3k} \{[(x_T - k)k + 1]^3 - 1\} \quad \dots(15)$$

Where  $x_T = z$  (previously defined) is the standard normal variate corresponding to the return period,  $T$  and  $k$  is related to the skewness coefficient by:

$$k = \frac{g_x}{6} \quad \dots(16)$$

When the skewness,  $g_x$ , is equal to zero, then  $K_T = x_T$  and the Log Pearson Type III distribution is identical to the Lognormal distribution (Chin, 2006).

The coefficient of skewness  $g_x$  (Haan, 1994) is given as:

$$g_x = \frac{n \sum_{i=1}^n (y_i - \bar{y})^3}{(n-1)(n-2)s_y^3} \quad \dots(17)$$

The value of  $Y$  with return period  $T$ ,  $y_T$  is given by:

$$y_T = \mu_y + K_T \cdot s_y \quad \dots(18)$$

Where  $\mu_y$  and  $s_y$  are as previously defined.

$K_T$  is the frequency factor ( $z$ ) of the Pearson Type III distribution with return period  $T$ . The value of the original variable,  $x$ , with the return period  $T$ ,  $x_T$ , is then given by:

$$x_T = \ln y_T^{-1} = e^{y_T} \quad \dots(19)$$

### 3. RESULTS

The time series plot of maximum or peak annual flows and mean of the 18 years annual flows is as shown in the annual hydrograph Fig. 2. The highest discharge of 271m<sup>3</sup>/s was observed in 1992 and declined to 178.6 in 1994. The minimum peak flow for Ona River in the Ogun-Oshun river basin was 121.2m<sup>3</sup>/s in the year 1983. Minimum and maximum mean annual flows were 79.2 and 145.6m<sup>3</sup>/s for 1983 and 1992 respectively. The difference in flow magnitudes can be attributed to intermittent ephemeral nature of the stream flow which usually dry up or have reduced flow in peak dry season or years with reduced rainfall events resulting in draughts.

#### (i) Normal Distribution

The regression equation for predicted values of Normal distribution with Hazen plotting position is given by  $y = 124.1e^{0.788x}$  ( $R^2 = 0.943$ ), Weibull plotting position gives  $y = 128.1e^{0.739x}$  ( $R^2 = 0.967$ ) while California plotting position is  $y = 126.7e^{0.772x}$  ( $R^2 = 0.964$ ). The Root Mean Square Error (RMSE) for Hazen, Weibull and California plotting positions are 6.988, 7.870 and 9.979 respectively. The return periods for 25, 50 and 100 year period with Hazen plotting position are 191.41, 190.53 and 190.08 with absolute differences of 67.4247, 71.1219 and 72.9706 respectively. The return periods for 25, 50 and 100 year period with Weibull plotting position are 191.42, 190.53 and 190.09 with absolute differences of 72.0310, 74.0166 and 75.0094 respectively. Also, the return periods for 25, 50 and 100 year period with California plotting position are 191.41, 191.41 and 190.09 with absolute differences of 72.3402, 75.0567 and 75.0906 respectively.

#### (ii) Log-Normal Distribution

The regression equation for predicted values of Log-Normal distribution with Hazen plotting position is given by  $y = 125.5e^{0.766x}$  ( $R^2 = 0.977$ ), Weibull plotting position gives  $y = 128.0e^{0.728x}$  ( $R^2 = 0.987$ ) while California plotting position is  $y = 124.9e^{0.800x}$  ( $R^2 = 0.948$ ). The Root Mean Square Error (RMSE) for Hazen, Weibull and California plotting positions are 6.390, 7.408 and 16.618 respectively. The return periods for 25, 50 and 100 year period with Hazen plotting position are 120.82, 115.15 and 112.31 with absolute differences of 3.1595, 4.2586 and 4.8082 respectively. The return periods for 25, 50 and 100 year period with Weibull plotting position are 123.11, 118.75 and 116.58 with absolute differences of 3.7233, 2.2364 and 1.4930 respectively. Also, the return periods for 25, 50 and 100 year period with California plotting position are 123.36, 119.15 and 117.05 with absolute differences of 4.2930, 2.7969 and 2.0488 respectively.

#### (iii) Log-Pearson Type III

The regression equation for predicted values of Log-Pearson Type III distribution with Hazen plotting position is given by  $y = 125.5e^{0.767x}$  ( $R^2 = 0.975$ ), Weibull plotting position gives  $y = 128.3e^{0.728x}$  ( $R^2 = 0.986$ ) while California plotting position is  $y = 125.6e^{0.789x}$  ( $R^2 = 0.957$ ). The Root Mean Square Error (RMSE) for Hazen, Weibull and California plotting positions are 6.011, 7.322 and 14.322 respectively. The return periods for 25, 50 and 100 year period with Hazen plotting position are 119.24, 113.14 and 110.10 with absolute differences of 4.7467, 6.2603 and 7.0170 respectively. The return periods for 25, 50 and 100 year period with Weibull plotting position are 121.74, 117.09 and 114.77 with absolute differences of 2.3516, 0.5763 and 0.3113 respectively. Also, the return periods for 25, 50 and 100 year period with California plotting position are 122.02, 117.53 and 114.76 with absolute differences of 2.9466, 1.1730 and 0.2338 respectively.

### 3.1 DISCUSSIONS

From the distributions and plotting position charts (Figs. 3-5), it was observed that all the probability distributions matched with Weibull plotting position gave similar values near the center of the distribution but varied considerably in the tails as seen in Figures (3c, 4c, and 5c). This observation was in agreement with Hann (1994). Furthermore, the Weibull plotting position when matched with Normal, Log-normal and Log Pearson Type III distributions have the highest Coefficient of determinations of 0.967, 0.987, and 0.986 respectively.

The three plotting positions and probability distributions shows that Hazen plotting position gave minimal errors with the root mean square errors of 6.988, 6.390, and 6.011 for Normal, Log-normal, and Log-Pearson Type III probability distributions respectively (Table 2). This is an indication to the fact that using Hazen plotting position to predict statistically, the central tendency of the predicted values to deviate from the observed flows will be minimal for the period under consideration.

The minimum absolute differences of 2.3516 and 0.5763 at return periods of 25-year and 50-year were obtained under the Log-Pearson Type III distribution when matched with Weibull plotting position respectively, while an absolute difference of 0.2338 at return periods of 100-year was obtained under the Log-Pearson Type III distribution when matched with California plotting position (Table 2). This implies that the magnitudes of error inherent between observed and predicted maximum flows at these different return periods are relatively minimal. Comparing the probability distributions, it was observed that the Log-normal distribution, there was a considerable reduction in the magnitude of the absolute differences for all the plotting positions. However, Log-Pearson Type III distribution with the least absolute differences for all the plotting positions is the best distribution among the three for Ona river under Ogun-osun river basin study location.

The findings above were in contrast with the works of Adeboye and Alatis (2007) which reported that Normal distribution combined with Weibull formula gave the best fit. These deviations may be as a result of differences in the definitions of frequency factor and skewness coefficient in Normal distribution and Log Pearson Type III Distribution respectively. However, similar results were obtained in this work when compared with Adeboye and Alatis (2007) when California plotting position were matched with Log-Pearson Type III for the river basin in the rain forest belt zone of Nigeria.

The comparison of predicted flows with 25, 50, and 100 years return period for different probability distributions (Fig. 6) showed that Normal distribution deviated greatly from the Log-normal and Log-Pearson type III distributions for the different plotting positions under consideration. Observed deviations of the Normal distribution may be attributed to the failure of not transforming the data on a logarithmic scale which was reported by GREHYS (1996) as a must for obtaining an estimate of the mean flood on an un-gauged catchment. Hence there is the need to consider other distribution characteristics other than the graphical appearance.

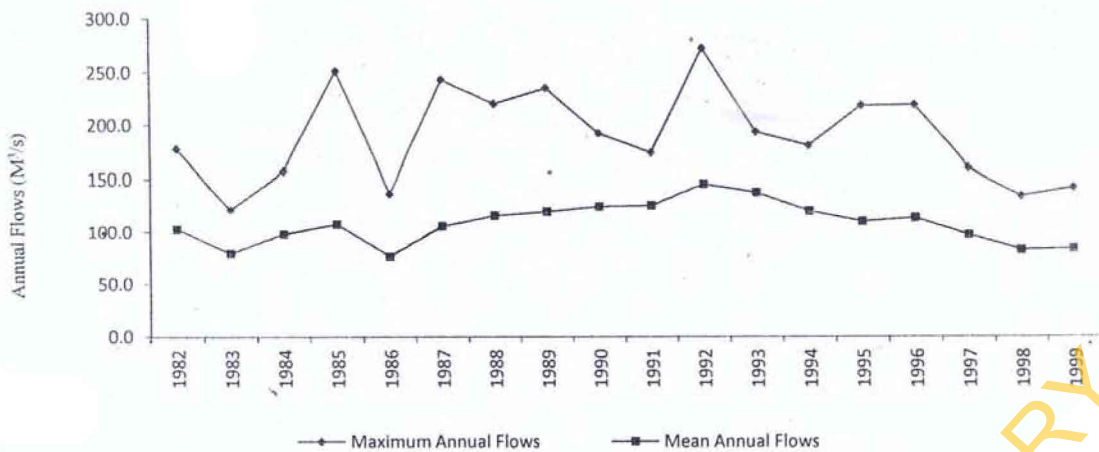


Figure 2: Annual Hydrograph of Ona River.

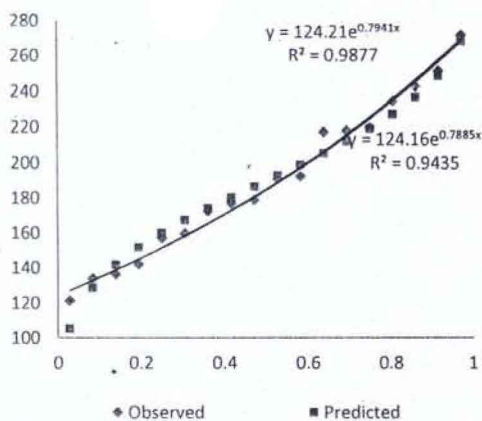


Figure 3a: Normal Distribution with Hazen Plotting Position

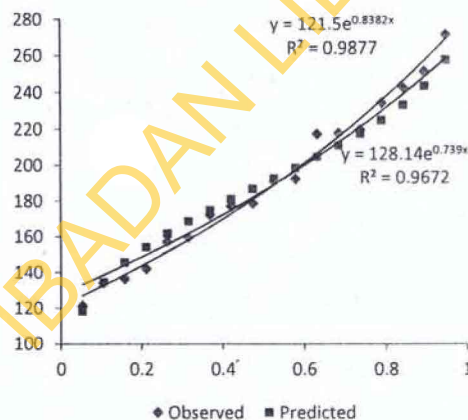


Figure 3b: Normal Distribution with Weibull Plotting Position

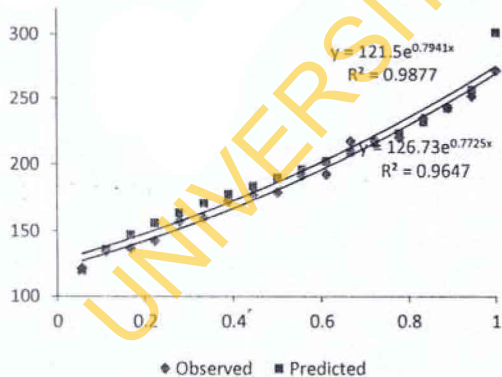


Figure 3c: Normal Distribution with California Plotting Position



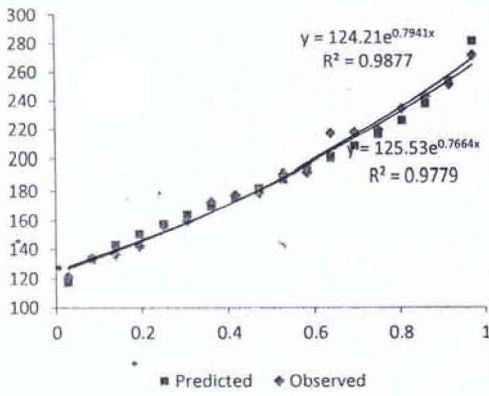


Figure 4a: Log-Normal Distribution with Hazen Plotting Position

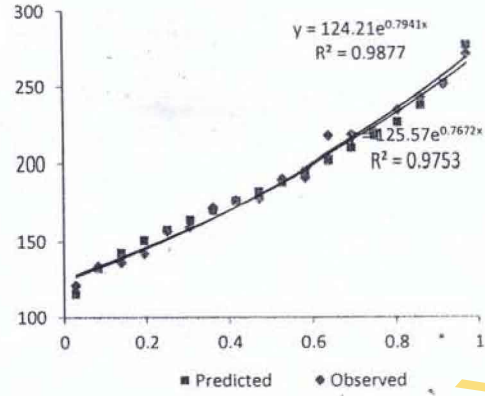


Figure 5a: Log-Pearson Type III Distribution with Hazen Plotting Position

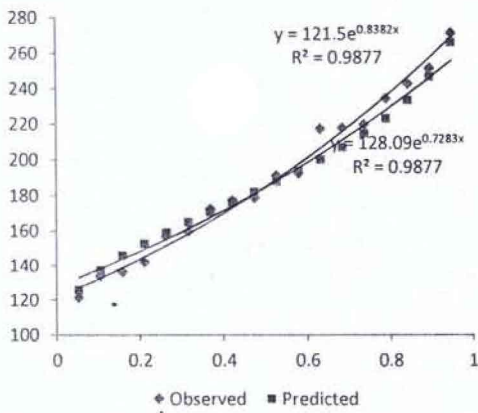


Figure 4b: Log-Normal Distribution with Weibull Plotting Position

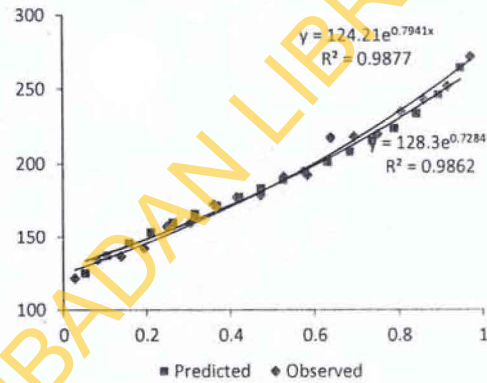


Figure 5b: Log-Pearson Type III Distribution with Weibull Plotting Position

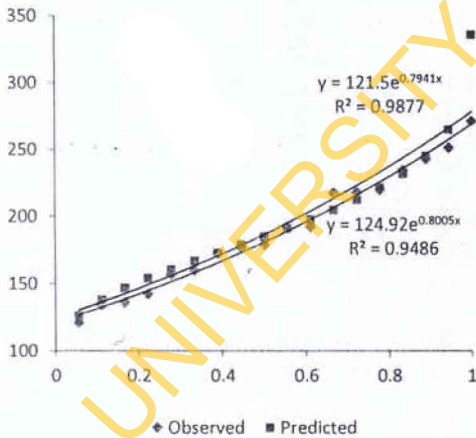


Figure 4c: Log-Normal Distribution with California Plotting Position

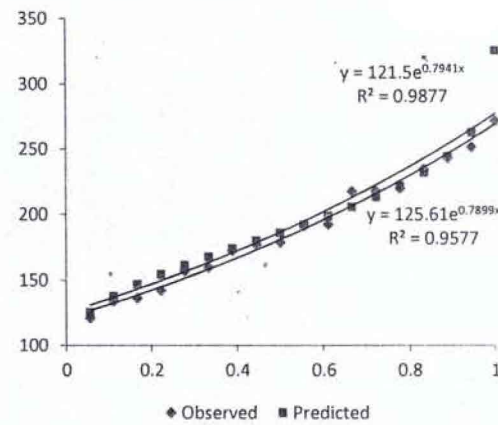


Figure 5c: Log-Pearson Type III Distribution with California Plotting Position

Table 2: Coefficients of determination, root mean square errors and absolute differences between observed and predicted discharges

	Plotting Positions	Probability Distributions								
		Normal			Log-Normal			Log-Pearson Type III		
Regression Coefficients (R <sup>2</sup> )	Hazen	0.943			0.977			0.975		
	Weibull	0.967			0.987			0.986		
	California	0.964			0.948			0.957		
Root Mean Squared Errors (RMSE)	Hazen	6.988			6.390			6.011		
	Weibull	7.870			7.408			7.322		
	California	9.979			16.618			14.322		
Return Periods (T)		25	50	100	25	50	100	25	50	100
Predicted Flows (M <sup>3</sup> /s)	Hazen	191.41	190.53	190.08	120.82	115.15	112.31	119.24	113.14	110.10
	Weibull	191.42	190.53	190.09	123.11	118.75	116.58	121.74	117.09	114.77
	California	191.41	191.41	190.09	123.36	119.15	117.05	122.02	117.53	114.76
Absolute Differences	Hazen	67.4247	71.1219	72.9706	3.1595	4.2586	4.8082	4.7467	6.2603	7.0170
	Weibull	72.0310	74.0166	75.0094	3.7233	2.2364	1.4930	2.3516	0.5763	0.3113
	California	72.3402	75.0567	75.0906	4.2930	2.7969	2.0488	2.9466	1.1730	0.2338

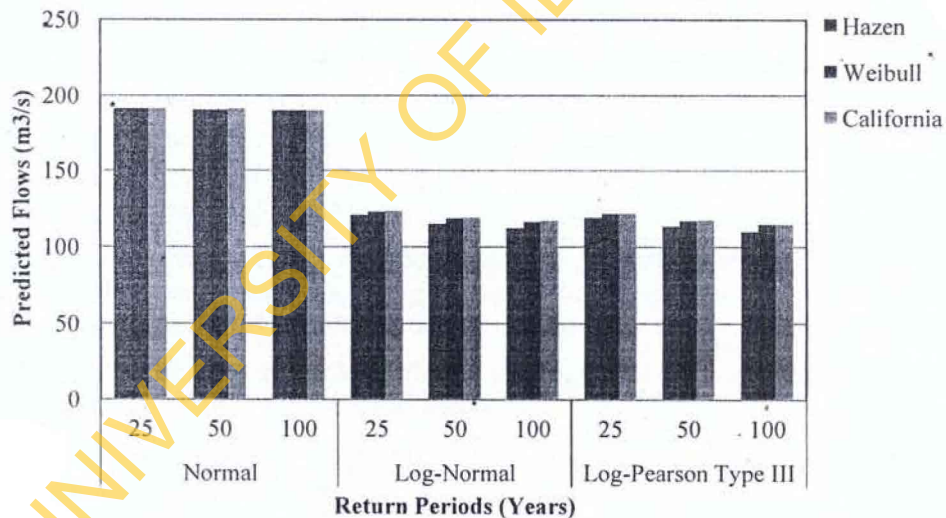


Figure 6: Comparison of Predicted Flows Return Periods for Different Probability Distributions.

#### 4. CONCLUSION

The following conclusions were drawn from the study:

- The annual maximum discharges for Ona River at Ogun-Oshun River Basin vary in magnitude ranging from 121.19m<sup>3</sup>/s to 271.01m<sup>3</sup>/s within between 1982 and 1999.
- All the three distributions had the highest coefficient of determination using Weibull's plotting position.
- Also, all the distributions had minimum (RMSE) when matched with Hazen plotting positions.
- Accumulation of the absolute differences between observed and predicted flows, California gave the least value of 209.46 followed by Weibull and Hazen with values of 210.99 and 241.77 respectively. Generally, California and Weibull plotting positions predicted observed flows better than Hazen plotting position.
- Hence, in predicting a maximum flood with a return period of 25-year and 50-year period, the Log-Pearson Type III probability distribution should be used with Weibull plotting position while the use of California plotting position with Log-Pearson Type III probability distribution is suggested for the prediction of 100-year maximum flood return period for the Ona river basin in the rain forest belt zone of Nigeria.

#### 5. REFERENCES

- Abdul-Karim, M. D. and Chowdhury, J. U. (1995). A comparison of four distributions used in flood frequency analysis in Bangladesh. *Hydrol. Sci. J.* 40(1), 55-66
- Abida, H and Ellouze, M. (2007). Probability distribution of flood flows in Tunisia. *Hydrol. Earth Syst. Sci. Discuss.*, 4, 957-981. [www.hydrol-earth-syst-sci-discuss.net/4/957/2007/](http://www.hydrol-earth-syst-sci-discuss.net/4/957/2007/)
- Adeboye, O. B. and Alatise, M. O. (2007). Performance of Probability Distributions and Plotting Positions in Estimating the Flood of River Osun at Apoje Sub-basin, Nigeria. *Agricultural Engineering International: the CIGR Ejournal*. Manuscript LW 07 007. Vol. IX.
- Alila, Y. and Mtiraoui, A. (2002). Implications of Heterogeneous Flood-frequency Distributions on Traditional Stream-discharge Prediction Techniques. *Hydrol. Process.* 16, 1065-1084. DOI: 10.1002/hyp.346
- Blazkova, S. and Beven, K. (1997). Flood frequency prediction for data limited catchments in the Czech Republic using a stochastic rainfall model and TOPMODEL. *Journal of Hydrology* 195: 256-278
- Burn DH. 1990. Evaluation of regional flood frequency analysis with a region of influence approach. *Water Resources Research* 26(10): 2257-2265.
- Ghin, D. A. (2006). *Water-Resources Engineering*. 2<sup>nd</sup> Edition. Pearson Prentice Hall, Upper Saddle River, New Jersey.
- Chow, V. T. (1964). *Handbook of Applied Hydrology*. McGraw-Hill, New York.
- Cunnane, C. (1989). *Statistical Distributions for Flood Frequency Analysis*. WMO Operational Hydrology Report no. 33. World Meteorological Organisation, 41 Giuseppe Motta, Casa Postale no. 5, CH 1211 Geneva, Switzerland.

- Eze, B. E. (1997). Rain Splash Detachment on Different Land Use Surfaces in a Humid Tropical Environment; A Case Study of Ibadan. Unpublished PhD Thesis, Department of Geography, University of Ibadan, Ibadan, Nigeria.
- Fill, H. D. and Stedinger, J. R. (1995). Homogeneity tests based upon Gumbel distribution and a critical appraisal of Dalrymple's test. *Journal of Hydrology* 166: 81-105
- Groupe de recherche en hydrologie statistique (GREHYS) (1996). Inter-comparison of regional flood frequency procedures for Canadian rivers. *Journal of Hydrology*, 186: 85-103.
- Groupe de Recherche en Hydrologie Statistique (GREHYS) (1996). Presentation and Review of Some Methods for Regional Flood Frequency Analysis. *Journal of Hydrology*, 186: 63-84.
- Gumbel, E. J. (1958). Statistics of Extreme Values. Columbia University Press. New York.
- Haan, C. T. (1994). Statistical Methods in Hydrology. Iowa State University Press. Ames.
- Hakfanir, T. (1991) Statistical modelling of maximum flows in Turkish rivers. *Hydrol. Sci. J.* 36(4), 367-389.
- Joshua, E. O. and Oyebanjo, O. A. (2009). Distribution of Heavy Metals in Sediments of Osun River Basin Southwestern Nigeria. *Research Journal of Earth Sciences* 1(2), 74-80.
- Lal, R. (1993). Tillage Effects on Soil Degradation, Soil Resilience, Soil Quality, and Sustainability. *Soil Tillage Research*. Vol. 27, pp. 1 - 8.
- Mutua, F. M. (1994) The use of the Akaike information criterion in the identification of an optimum flood frequency model. *Hydrol. Sci. J.* 39(3), 235-244.
- Ouarda, T. B., Cunderlik, M. J., St-Hilaire, A., Barbet, M., Bruneau, P. and Bobe'e, B. (2006). Data-based comparison of seasonality-based regional flood frequency methods. *Journal of Hydrology* 330: 329– 339.
- Öztekin, T., Karaman, S. and Brown, L. C. (2007). The Best Distributions for maximum and Minimum Daily Temperatures of Columbus, Ohio. *ASABE Paper No. 072298. St. Joseph, Mich.: ASABE*.
- Pandey, G. R. and Nguyen, V. T. V. (1999). A comparative study of regression based methods in regional flood frequency analysis. *Journal of Hydrology* 225: 92–101.
- Patel, J. A. (2007). Evaluation of Low Flow Estimation Techniques for Ungauged Catchments. *Water and Environment Journal*. Vol. 21 Pp. 41–46.
- Saf, B. (2008). Application of Index Procedures to Flood Frequency Analysis in Turkey. *Journal of the American Water Resources Association (JAWRA)* 44(1):37-47. DOI: 10.1111/j.1752-1688.2007.00136.x
- Singh, V. P. and Strupczewski, W. G. (2002). On the Status of Flood Frequency Analysis. *Hydrol. Process.* 16, 3737–3740. DOI: 10.1002/hyp.5083
- Vogel, R. M., Thomas, W. O. and McMahon, T. A. (1993). Flood-flow frequency model selection in the south western United States. *Wat. Resour. Plan. Manage. ASCE* 119(3), 353-366.
- Wallis, J. R. (1988) Catastrophes, computing and containment: living in our restless habitat. *Speculation in Science and Technology* 11(4). 295-315.

## 6. APPENDIX

Max Observed Q Ft <sup>2</sup> /s	Max Observed Q m <sup>2</sup> /s	Rank	P-Exceedance (Hazen)	P-Exceedance (Weibull)	P-Exceedance (California)	Normal Distribution			LogNormal Distribution			Log Pearson Type III Distribution		
						Predicted Q (Hazen)	Predicted Q (Weibull)	Predicted Q (California)	Predicted Q (Hazen)	Predicted Q (Weibull)	Predicted Q (California)	Predicted Q (Hazen)	Predicted Q (Weibull)	Predicted Q (California)
4282.5	121.19	1	0.03	0.05	0.06	190.87	191.97	192.1	117.36	125.85	126.65	115.52	124.66	125.52
4731.5	133.9	2	0.08	0.11	0.11	193.32	194.29	194.55	133.12	137.32	138.34	132.43	136.89	137.98
4815.5	136.28	3	0.14	0.16	0.17	195.77	196.61	197	142.86	145.67	146.91	142.74	145.7	147
5019	142.04	4	0.19	0.21	0.22	198.22	198.93	199.45	150.64	152.69	154.14	150.91	153.05	154.56
5548	157.01	5	0.25	0.26	0.28	200.67	201.25	201.9	157.48	159.01	160.69	158.02	159.61	161.34
5637.5	159.54	6	0.31	0.32	0.33	203.12	203.57	204.35	163.8	164.93	166.85	164.56	165.72	167.69
6086.5	172.25	7	0.36	0.37	0.39	205.57	205.89	206.8	169.85	170.63	172.82	170.76	171.56	173.8
6253.5	176.97	8	0.42	0.42	0.44	208.02	208.21	209.24	175.79	176.26	178.76	176.81	177.29	179.82
6310.5	178.59	9	0.47	0.47	0.5	210.47	210.53	211.69	181.74	181.9	184.76	182.83	182.99	185.87
6748.8	190.99	10	0.53	0.53	0.56	212.92	212.85	214.14	187.83	187.66	190.95	188.95	188.78	192.07
6791	192.19	11	0.58	0.58	0.61	215.37	215.17	216.59	194.16	193.65	197.47	195.27	194.76	198.55
7669.5	217.05	12	0.64	0.63	0.67	217.82	217.5	219.04	200.89	199.98	204.47	201.93	201.03	205.44
7690	217.63	13	0.69	0.68	0.72	220.27	219.82	221.49	208.21	206.81	212.17	209.11	207.74	212.98
7756	219.49	14	0.75	0.74	0.78	222.72	222.14	223.94	216.39	214.36	220.93	217.07	215.1	221.46
8273.9	234.15	15	0.81	0.79	0.83	225.17	224.46	226.39	225.88	222.96	231.36	226.21	223.41	231.44
8566	242.42	16	0.86	0.84	0.89	227.62	226.78	228.84	237.54	233.22	244.7	237.3	233.21	244.03
8869	250.99	17	0.92	0.89	0.94	230.06	229.1	231.29	253.33	246.37	264.45	252.09	245.6	262.33
9576.2	271.01	18	0.97	0.95	1	232.51	231.42	233.74	280.81	265.84	335.36	277.19	263.61	324.82